

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 382 242
A1

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 90102581.7

(51) Int. Cl.⁵: **C10M 141/10, //(C10M141/10,
135:36,137:02,137:04,137:08,
137:10,137:12),C10N40:04,
C10N40:08**

(22) Date of filing: 09.02.90

(30) Priority: 10.02.89 JP 31628/89

(43) Date of publication of application:
16.08.90 Bulletin 90/33

(64) Designated Contracting States:
DE FR GB

(71) Applicant: **COSMO OIL COMPANY, LTD**
No. 1-1 Shibaura 1-chome Minato-ku
Tokyo(JP)


Applicant: **NISSAN MOTOR CO., LTD.**
No.2, Takara-cho, Kanagawa-ku
Yokohama-shi Kanagawa-ken 221(JP)

(72) Inventor: **Tochigi, Hiroshi**
20-2-102, Hanaguri 4-chome
Soka-shi, Saitama(JP)
Inventor: **Hirose, Yasunori**
10-19, Hanaguri 4-chome
Soka-shi, Saitama(JP)
Inventor: **Kikuchi, Hiroto**
5-9, Fujimoto 1-chome
Hiratsuka-shi, Kanagawa(JP)

(74) Representative: **Hansen, Bernd, Dr.rer.nat. et**
al
Hoffmann, Eitle & Partner Patentanwälte
Arabellastrasse 4 Postfach 81 04 20
D-8000 München 81(DE)

(54) Hydraulic fluid composition for power steering.

(57) A hydraulic fluid composition for power steering is disclosed, which comprises (a) at least one phosphorus containing compound selected from the group of alkyl, or alkyl substituted or unsubstituted phenyl phosphorus acid compounds, alkyl, or alkyl substituted or unsubstituted phenyl phosphorus thioacid compounds, alkyl, or alkyl substituted or unsubstituted phenyl phosphorus dithioacid compounds, and (b) one or more thiadiazole derivatives represented by the formula:

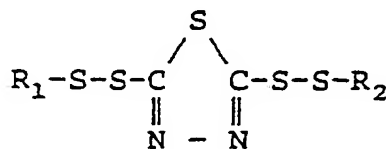

where R₁ and R₂ independently denote a linear or branched alkyl group having 1 to 12 carbons. The composition enables hydraulic systems to be used for longer times without accelerating deterioration of rubber materials employed in the hydraulic system.

EP 0 382 242 A1

HYDRAULIC FLUID COMPOSITION FOR POWER STEERING

FIELD OF THE INVENTION

The present invention relates to a working fluid composition for power steering, more particularly to a hydraulic fluid composition for a hydraulic power steering system which multiplies steering power by an oil pump driven by engine and a control valve, an actuator, etc. actuated by a driver's steering.

BACKGROUND OF THE INVENTION

Power steering systems, which were employed in approximately 20% of all passenger cars about five years ago, have recently become so popular that approximately 80% of all passenger cars employ a power steering system. Accordingly, the type of the hydraulic fluid for power steering is changing from the double-purpose type which also employs automatic transmission fluid (AFT) to the single-purpose type which is an oil for power steering.

In use, a hydraulic fluid for power steering is circulated by means of a vane pump or a gear pump at a pressure of from about 80 to about 105 kg/cm²G at a temperature of about 60 to about 120° C. Moreover, the hydraulic fluid is normally not replaced before the car is scrapped. Moreover, the hydraulic fluid is required to have low temperature starting characteristics and to provide smooth cylinder movement in cold areas. Therefore, the hydraulic fluid should prevent abrasion, should show low temperature fluidability, have good thermal oxidation stability, have low friction characteristics and be inert to sealing materials used in the power steering system. To satisfy these requirements, various additives are incorporated in a selected base oil to provide a hydraulic fluid composition for power steering.

DESCRIPTION OF THE PRIOR ARTS

Heretofore, most hydraulic fluids for power steering contained zinc dithiophosphate which serves as an abrasion preventing and oxidation preventing agent for the purpose of satisfying the above mentioned requirements. Such a fluid may deteriorate rubber parts in the power steering system on prolonged use at normal service temperature of 60 to 100° C to form crack, such rubber parts, thus causing leakage of the fluid or malfunction of the power systems.

The inventors of the present invention assumed that the combination of the rubber parts in the system caused dissolution of copper or plated copper in the system into the hydraulic fluid and the copper reacted with the nitrile group of nitrile rubber parts to form a complex, resulting in the deterioration (hardening) of rubber (nitrile rubber) in the hydraulic system. The dissolution of the copper is assumed to be first due to the elution of copper caused by the added zinc dithiophosphate. The elution of copper is decreased to some extent in systems which do not contain zinc dithiophosphate, but cannot completely be prevented, so that the deterioration of the rubber material cannot be avoided. For this reason, an additive to replace zinc dithiophosphate as well as an additive capable of effectively suppressing the dissolution of copper has been desired.

SUMMARY OF THE INVENTION

The inventors of the present invention, after extensive research to solve the above problems, found that the dissolution of copper into the hydraulic fluid is inhibited by adding a phosphorus acid compound in combination with a thiadiazole derivative, and with such combination it is not necessary to use zinc dithiophosphate, and thus completed the present invention.

An object of the present invention is to provide a novel hydraulic fluid composition for power steering systems.


Another object of the present invention is to provide a hydraulic fluid composition for power steering

systems which enables stable use of hydraulic systems for long terms without accelerating the deterioration of rubber materials employed in the hydraulic system.

The present invention provides a hydraulic fluid composition for power steering systems comprising;

- (a) at least one phosphorus-containing compound selected from the group consisting of alkyl, or alkyl-substituted or unsubstituted phenyl phosphorus acid compounds, alkyl, or alkyl substituted or unsubstituted phenyl phosphorus thioacid compounds, and alkyl, or alkyl substituted or unsubstituted phenyl phosphorus dithioacid compounds, and

- (b) one or more thiazazole derivatives represented by the formula:

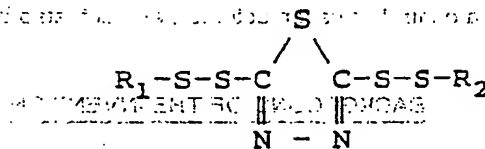


where R_1 and R_2 independently denote a linear or branched alkyl group having 1 to 12 carbons.


DETAILED DESCRIPTION OF THE INVENTION

The alkyl, or alkyl substituted or unsubstituted phenyl phosphorus acid compounds employed in the present invention include phosphite esters represented by the formula:


(R_3O)₃-P or (R_4O)₂-P=O
phosphonate esters represented by the formula:




orthophosphate esters represented by the formula:





pyrophosphate esters represented by the formula:

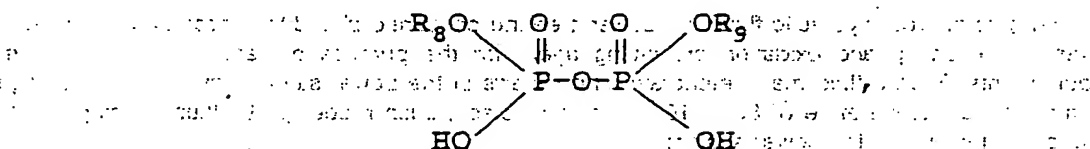


acid phosphate esters represented by the formula:




and neutral amine salts or partially neutralized amine salts of acid phosphate esters represented by the formula:

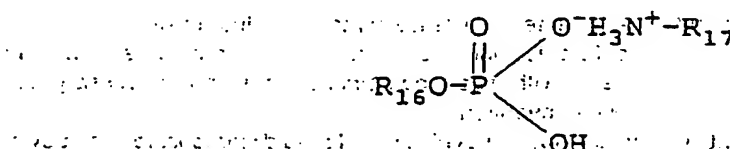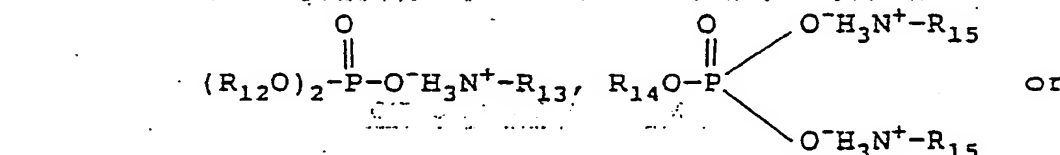



The alkyl, or alkyl substituted or unsubstituted phenyl phosphorus thioacid compounds include thiophosphate esters represented by the formula:




acid thiophosphate esters represented by the formula:




and neutral amine salts or partially neutralized amine salts of acid thiophosphate esters represented by the formula:

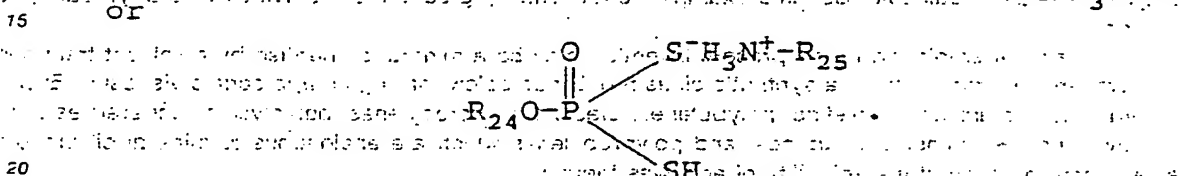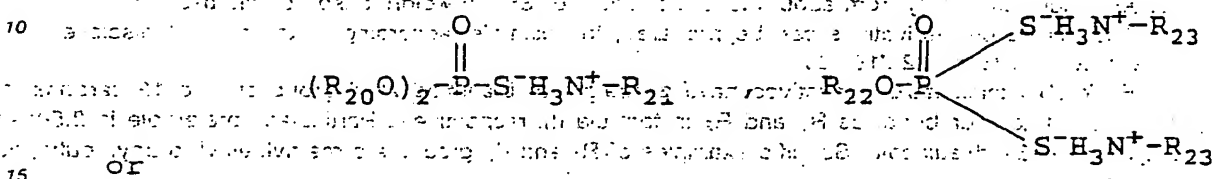


The alkyl, or alkyl substituted or unsubstituted phenyl phosphorus dithioacid compounds include dithiophosphate esters represented by the formula:



and acid dithiophosphate esters represented by the formula:



and neutral amine salts or partially neutralized amine salts of acid dithiophosphate esters represented by the formula:

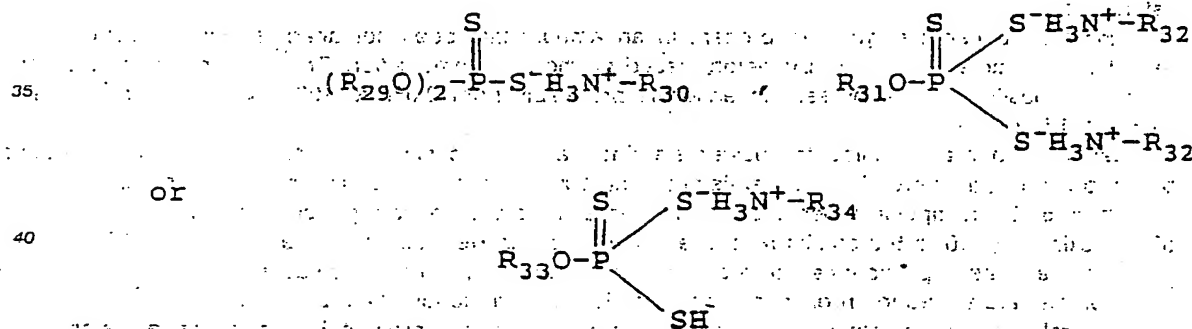


R_3 to R_{34} for these phosphorus compounds represent alkyl, or alkyl substituted phenyl or unsubstituted phenyl groups. These phosphorus compounds are already known in the art.

The alkyl group of the phosphorus compounds is a straight or branched alkyl having 1 to 18 carbons. Specific examples thereof are methyl, ethyl, propyl, butyl, hexyl, octyl, nonyl, hexadecyl, octadecyl, etc.

The alkyl group of the alkyl substituted phenyl group is the same as above.

These phosphorus compounds may be employed singly or as a combination of two or more thereof. The phosphorus compounds are added singly or as a combination of two or more thereof in an amount ranging from about 0.005% to about 0.5% by weight in terms of phosphorus content based on the base oil, preferably from about 0.02% to 0.07% by weight. The addition of too much thereof does not give a corresponding effect while cost increases, while insufficient addition does not give the intended effect.

One or more of the thiadiazole derivatives represented by the formula below of the present invention:

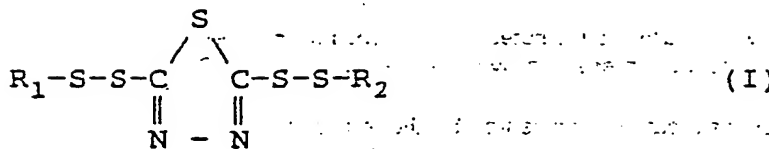

5

where R₁ and R₂ independently denote straight or branched alkyl groups having 1 to 12 carbons, are added, preferably in an amount ranging from about 0.007% to about 0.33% by weight in terms of sulfur content, more preferably from about 0.018% to about 0.18% by weight based on the base oil.

The thiadiazole derivatives can be prepared, for example, according to the method disclosed in U.S. Patents 2,719,125, and 2,719,126.

Preferable thiadiazole derivatives have a straight or branched alkyl group of 1 to 12 carbons, more preferably 1 to 8 carbons, as R₁ and R₂ in formula (I), respectively. Particularly preferable is 2,5-bis(tert-octyldithio)-1,3,4-thiadiazole. Specific examples of R₁ and R₂ groups are methyl, ethyl, propyl, butyl, hexyl, and octyl.

The base oil employed in the present invention may be a mineral oil purified by a solvent treatment or a hydrogenation treatment, or a synthetic oil as mentioned below, having an appropriate viscosity. Examples of synthetic oils are poly- α -olefins, polybutenes, diesters, polypropylenes, polyglycols, hindered esters, etc. However, poly- α -olefins, polybutenes, and polypropylenes which are analogous to mineral oil are preferable in consideration of the solubility of additives therein.

The hydraulic fluid composition of a power steering system per the present invention may additionally contain a known additives in conventional amounts such as an anticorrosion agent, e.g., an amine; an antioxidizing agent, e.g., of the phenol type; a viscosity index improver, e.g., a polymethacrylate; a detergent dispersant, e.g., a sulfonate; and an antifoaming agent.

More particularly, the anticorrosion agents include amine type anticorrosion agents, alkenylsuccinic imides, alkenyl succinic esters, etc. The antioxidation agents include those of the amine type, the phenol type, etc. The viscosity index improvers include polymethacrylates, olefin copolymers, etc. Useful detergents of the metal type include alkaline earth metal sulfonate, alkaline earth metal phenates, etc. Useful ashless type dispersants include alkenylsuccinic imides, alkenylsuccinic esters, amides of a long-chain fatty acid with a polyamine (amino-amido type), etc. Useful friction controlling agents such as a fatty acid and an organic molybdenum compound may be used. Useful antifoaming agents include silicone compounds, esters, etc.

Zinc dithiophosphate may be present in an amount that does not affect elution of rubber additives: namely, less than about 0.01% by weight based on the total composition. The total amount of the additives in the composition of the present invention is preferably from 2.0% to 20% by weight, more preferably 3.0% to 15% by weight.

Generally, hydraulic fluids for power steering have a viscosity of approximately 5 to 9 centistokes, preferably approximately 7 to 8 centistokes, at 100°C, and a viscosity of 50,000 centipoise or less, preferably 5,000 centipoise or less, at -20°C. Therefore, a base oil is preferably used which has a viscosity of approximately 3.0 to 6.0 centistokes, preferably approximately 3.0 to 4.5 centistokes at 100°C, to which a polymethacrylate type polymer, or a combination of polypropylene or polybutene with a polymethacrylate type polymer are added in order to increase the viscosity and to lower the pour point.

Generally, the polymethacrylate type polymer used in the present invention has a weight average molecular weight (M_w) of about 50,000 to 400,000 and a number average molecular weight (M_n) of about 20,000 to 150,000, and it is added in the range of about 2wt% to 10wt% based on the base oil.

Generally, the polypropylene used in the present invention has a weight average molecular weight of about 40,000 to 250,000 and the polybutene used in the present invention has a weight average molecular weight of about 50,000 to 300,000, and they are added in the range of about 2wt% to 15wt% based on the base oil.

The hydraulic fluid for power steering of the present invention, which contains the phosphorus compound and the thiadiazole derivative, is capable of preventing damage to piston sealing materials of a power cylinder caused by corrosion, thus preventing leakage of the hydraulic fluid, and providing long term, stable power steering operation, which could not be achieved by the prior art, without impairing other performance levels of conventional power steering hydraulic fluids.

The present invention is now illustrated by Examples and Comparative Examples. In the Examples and the Comparative Examples, the compositions were evaluated as below.

Metal corrosion test:

This test comprises two test stages: a pre-treatment of extracting rubber compounding ingredients (extraction test), and a metal corrosion test employing the above extraction liquid.

5 The procedure of the extraction test is as follows:

- (1) A Teflon stirrer is put in a 1000 ml glass beaker and a stainless metal gauze is set in the bottom of the beaker in such a manner that the metal gauze is not prevent the turning of the stirrer.
- (2) A rectangular rubber component is placed on the stainless metal gauze.
- (3) 800 ml of test oil is poured into the beaker, and the test is conducted according to the following

10 test condition.

The procedure of metal corrosion test is as follows:

(1) With respect to the metal catalyst, a steel plate, a cast iron plate and an aluminum plate are installed on a copper plate in almost similar intervals using a stainless bolt and a Teflon washer. Then this copper plate is changed into a pipe shape and inserted into a 400 ml of glass beaker.

15 (2) Next, the oil obtained after the extraction test is poured into the glass beaker and the test is conducted according to the following test condition.

The metal content and the change in the weight and appearance of the metal catalyst are evaluated after the corrosion test.

Extraction test conditions

20 Temperature: 100 °C

Method of stirring: Stirrer, about 200 r.p.m.

Time: 96 hours

Rubber parts: A rubber parts (butadiene/acrylonitrile copolymer; hardness(Hs) 74 point, tensile strength 150kgf/cm², extension 270%) used in a hydraulic system is peeled off and cut into rectangular pieces of 5

25 cm in length, 2 cm in width, and 0.2 cm in thickness for the test.

Metal corrosion test conditions

Tester: Indiana stirring oxidation stabilization tester (JIS K2514 3.1)

Test oil: 300 ml (the oil used for extraction)

Temperature: 100 °C

30 Rotation speed: 1300 r.p.m.

Time: 144 hours

Metal catalyst: Copper plate (75×180×0.8 mm), steel plate, cast iron plate, and aluminum plate (respectively 12×80×0.8 mm)

35

Rubber material deterioration test:

The procedure of the rubber material deterioration test is as follows:

- (1) 150 ml of the oil which is obtained after the metal corrosion test is poured into a 200 ml beaker.
- (2) A sealing material (U packing having outer diameter of 34mm and inner diameter of 22mm) is suspended on a stainless wire (diameter 1mm) and the sealing material is dipped into the oil.
- (3) The sealing material is allowed to stand according to the following test condition.
- (4) After the test, the sealing material is taken off from the beaker and washed with n-hexane. Th

45 matter is formed.

Test conditions

Test oil: 150 ml (oil after metal corrosion test)

Temperature: 100 °C

Time: 144 hours

50 Sealing material: NBR (hardness(Hs) 75 point, tensile strength 190 kgf/cm²), acrylic rubber (hardness(Hs) 70 point, tensile strength 104kgf/cm², extension 200%)

Actual Driving Test:

55

The test oil is charged to a test car (commercially available 1800cc gasoline engine car having a rack-and-pinion type power steering system), and is tested under normal driving conditions for an extended period. The hydraulic system is then disassembled to observe the state of the rubber therein and to

determine the quantity of copper in the oil.

Examples 1 to 6, and Comparative Examples 1 to 4

5

The compositions employed in the Examples and Comparative Examples are shown in Table 1.

The tricresyl phosphate used in Example 1 had a phosphorus content of 8.4% by weight and a total acid value of 0.05 mgKOH/g. The triaryl phosphate used in Examples 2 and 3 and Comparative Example 4 had a phosphorus content of 5.1% by weight and a total acid value of 0.05 mgKOH/g. The tris-nonylphenyl phosphite used in Example 4 had a phosphorus content of 7.4% by weight. The trialkyl thiophosphate (where the alkyl was C_{12}/C_{13} = 50/50 by mol) used in Example 5 had a phosphorus content of 4.8% by weight and a sulfur content of 5.4% by weight. The di(2-ethylhexyl) dithiophosphate used in Example 6 had a phosphorus content of 8.8% by weight, and a sulfur content of 17.4% by weight.

The 2,5-bis(tert-octyldithio)-1,3,4-thiadiazole used in Examples 1 to 6 and Comparative Example 1 had a sulfur content of 35.8% by weight, and a nitrogen content of 6.0% by weight.

Other additives used in Examples and Comparative Examples were as below. The succinic imide dispersant was made by KARONITE CHEMICAL CO., LTD. with the trade name "OLOA-1200" (nitrogen content of 2.1% by weight). The polymethacrylate viscosity improver was made by Sanyo Chemical Industries, Ltd. with the trade name of "Aclube 516". The Ca sulfonate had a calcium content of 11.5% by weight and a total base number of 300 mgKOH/g. The magnesium sulfonate had a magnesium content of 9.5% and a total base number of 400 mgKOH/g. The alkyldiphenylamine had a nitrogen content of 3.4% by weight; it was made by R.T. Vanderbilt Co., Inc. with the trade name of "VANLUBE". The zinc di(2-ethylhexyl)dithiophosphate had a zinc content of 8.8% by weight. The 1,2,3-benzotriazole had a nitrogen content of 22% by weight. The silicone type defoaming agent was made by Shin-Etsu Chemical Co., Ltd. with the trade name of "KF-96" (10,000 centistokes at 25 °C).

As shown in Table 2, in the case of fluids containing a phosphate ester or a phosphite ester, and 2,5-bis(tert-octyldithio)-1,3,4-thiadiazole (Examples 1 to 6), the elution of copper was inhibited, rubber was not affected, and no abnormality was observed at in the actual driving test. In the case of fluids containing zinc dithiophosphate (Comparative Examples 1 to 3), copper elution was significant and the rubber material was deteriorated, even with 2,5-bis(tert-octyldithio)-1,3,4-thiadiazole added to the fluid (Comparative Example 1).

Moreover, 1,2,3-benzotriazole, which is considered to be usually effective in copper elution inhibition, was not effective (Comparative Examples 2 and 4).

As shown in Table 3, the hydraulic fluid composition of the present invention had appropriate properties such as a suitable viscosity for use as a hydraulic fluid for a hydraulic system.

35

40

45

50

55

Table 1

	Example				Comparative Example					
	1	2	3	4	5	6	1	2	3	4
Base oil 1)	3.7	4.3	3.9	3.0	3.7	3.7	3.7	3.7	4.3	3.9
Kinematic viscosity, cst at 100°C	3.7	4.3	3.9	3.0	3.7	3.7	3.7	3.7	4.3	3.9
Additive 2)										
Tricresyl phosphate	0.4	-	-	-	-	-	0.2	0.2	0.2	-
Trilauryl phosphate	-	0.4	0.2	-	-	-	-	-	-	0.4
Tris-nonylphenyl phosphite	-	0.03	0.03	0.4	0.03	0.03	0.03	0.03	0.03	-
Trialkyl thio-phosphate	-	-	0.03	0.03	0.63	0.03	0.03	0.03	-	-
Di-(2-ethylhexyl) dithiophosphate	-	-	0.03	0.03	-	0.34	-	-	-	-
2,5-bis(tert-octyl-dithio)-1,3,4-thiadiazole	0.1	0.15	0.1	0.15	0.1	0.1	0.15	-	-	-
Succinic imide dispersant	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Polymethacrylate V.I. improver	7.0	3.2	5.9	9.0	7.0	7.0	7.0	7.0	3.2	3.2
Calcium sulfonate	0.05	0.05	-	-	0.05	0.05	0.05	0.05	-	-

Table 1 (cont'd)

	Example				Comparative Example					
	1	2	3	4	5	6	1	2	3	4
Magnesium sulfonate	-	-	0.05	0.05	-	-	-	-	0.05	0.05
Alkyl(C ₂ H ₅ (50)/C ₉ H ₁₉ (50)) diphenyl amine	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Silicone defoaming agent	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002
Zinc di(2-ethyl hexyl)dithio- phosphate	-	-	-	-	-	-	0.7	0.5	0.4	-
1,2,3-benzotriazole	-	-	-	-	-	-	-	0.15	-	0.10

Remark 1)
The mixture of highly refined and hydrogenated paraffin oil
(A) (32 cSt at 40°C) with hydrogenated dewaxed oil (B) (12
cSt at 40°C)

Remark 2)
The amount of the additive is in % by weight of the base
oil.

Table 2

5				Actual Driving test	
		Metal corrosion test	Rubber material deterioration	Deterioration of	Copper
		Copper concentration	test. Change of properties 3)	rubber parts, 4)	in oil
		(ppm)			(ppm)
10	Example 1	21	none	none	38
	" 2	15	none	none	50
	" 3	13	none	none	-
	" 4	14	none	none	-
	" 5	24	none	none	42
	" 6	28	none	none	52
15	Comparative Example 1	180	changed	deteriorated	800
	" 2	250	changed	deteriorated	900
	" 3	350	changed	-	-
	" 4	200	changed	-	-
20	Remark				

3) Hardness, tensile strength, etc.

4) Deterioration in physical properties

Table 3

Item	Example					
	1	2	3	4	5	6
Kinematic viscosity at 40 °C	32.62	41.53	38.18	26.77	32.28	32.39
cSt at 100 °C	7.342	7.536	7.882	7.248	7.223	7.301
cP at -20 °C	1300	2500	1700	700	1350	1300
Viscosity index	201	151	184	257	198	201
Total acid number, (mg/KOH/g)	0.24	1.16	0.72	0.31	0.12	0.80
Total base number, (mg/KOH/g)	0.80	0.78	1.09	1.35	0.80	0.72
Content of element ⁵⁾ , % by weight:	0.036	0.054	0.036	0.054	0.070	0.095
Sulfur						
Phosphorus	0.034	0.020	0.010	0.030	0.030	0.030
Pour point, (°C)	-55.0	-47.5	-50.0	-57.5	-52.5	-52.5
Pendulum II type friction coefficient	0.13	0.12	0.12	0.12	0.13	0.13
Oxidation stability (150 °C, 96 hrs., JIS K2514) Viscosity ratio, at 40 °C	1.0	1.0	1.0	1.0	1.0	1.0
Load carrying property (JIS K2519) OK load, kg/cm ²	2.0	3.0	2.5	2.5	2.0	2.0
Remark						

5): The amount of the elements coming from the additives.


While the invention has been described in detail and with reference to specific embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made therein without departing from the spirit and scope thereof.

Claims

1. A hydraulic fluid composition for power steering comprising:

(a) at least one phosphorus containing compound selected from the group consisting of alkyl, or alkyl substituted or unsubstituted phenyl phosphorus acid compounds; alkyl, or alkyl substituted or unsubstituted phenyl phosphorus thioacid compounds; and alkyl, or alkyl substituted or unsubstituted phenyl phosphorus dithioacid compounds;

(b) one or more thiadiazole derivatives represented by the formula:

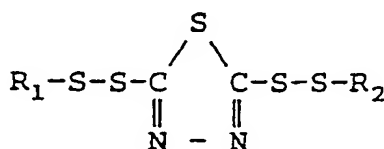

where R₁ and R₂ independently denote a linear or branched alkyl group having 1 to 12 carbons; and

(c) a base oil

2. The hydraulic fluid composition for power steering of Claim 1, wherein said alkyl, or alkyl substituted or unsubstituted phenyl phosphorus acid compounds are selected from the group consisting of phosphite esters, phosphonate esters, orthophosphate esters, pyrophosphate esters, acid phosphate esters, and neutral amine salts or partially neutralized amine salts of acid phosphate esters.

3. The hydraulic fluid composition for power steering of Claim 1, wherein said alkyl, or alkyl substituted or unsubstituted phenyl phosphorus thioacid compounds are selected from the group consisting of thiophosphate esters, acid thiophosphate esters, and neutral amine salts or partially neutralized amine salts of the acid thiophosphate esters.

4. The hydraulic fluid composition for power steering of Claim 1, wherein said alkyl, or alkyl substituted or unsubstituted phenyl phosphorus dithioacid compounds are dithiophosphate esters, acid dithiophosphate esters, and neutral amine salts or partially neutralized amine salts of the acid dithiophosphate esters.

5. The hydraulic fluid composition for power steering of Claim 2, wherein said alkyl group of the alkyl, or alkyl substituted or unsubstituted phenyl phosphorus acid compound is a straight or branched alkyl group having 1 to 18 carbons.

6. The hydraulic fluid composition for power steering of Claim 3, wherein said alkyl group of the alkyl, or alkyl substituted phenyl phosphorus thioacid compound is a straight or branched alkyl group having 1 to 18 carbons.

7. The hydraulic fluid composition for power steering of Claim 4, wherein said alkyl group of the alkyl, or alkyl substituted phenyl phosphorus dithioacid compound is a straight or branched alkyl group having 1 to 18 carbons.

8. The hydraulic fluid composition for power steering of Claim 1, wherein said thiadiazole derivative is 2,5-bis(tert-octyldithio)-1,3,4-thiadiazole.

9. The hydraulic fluid composition for power steering of Claim 1, wherein said phosphorus containing compound is contained in an amount ranging from about 0.005% to about 0.5% by weight in terms of phosphorus content based on the base oil.

10. The hydraulic fluid composition for power steering of Claim 1, wherein said phosphorus containing compound is contained in an amount ranging from about 0.02% to about 0.07% by weight in terms of phosphorus content based on the base oil.

11. The hydraulic fluid composition for power steering of Claim 1, wherein said thiadiazole derivative is contained in an amount ranging from about 0.007% to about 0.33% by weight in terms of sulfur content based on the base oil.

12. The hydraulic fluid composition for power steering of Claim 1, wherein said thiadiazole derivative is contained in an amount ranging from about 0.018% to about 0.18% by weight in terms of sulfur content based on the base oil.

13. The hydraulic fluid composition for power steering of Claim 1, wherein the composition has a viscosity ranging from about 5 cst to about 9 cst at 100° C, and from about 200 cp to about 50,000 cp at -20° C.

14. The hydraulic fluid composition for power steering of Claim 1, wherein the composition has a viscosity ranging from about 7 cst to about 8 cst at 100° C, and from about 500 cp to about 5,000 cp at -20° C.

10

15

20

25

30

35

40

45

50

55

60

65

70

75

80

85

90

95

100

105

110

115

120

125

130

135

140

145

150

155

160

165

170

175

180

185

190

195

200



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 90 10 2581

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X	WO-A-8 604 601 (LUBRIZOL) * Page 92, claims 11,13; page 56, paragraph 2 - page 66, paragraph 2; page 72, paragraph 2 *	1,2,5,8 -14	C 10 M 141/10 // (C 10 M 141/10 C 10 M 135:36 C 10 M 137:02 C 10 M 137:04 E 10 M 137:08 C 10 M 137:10 C 10 M 137:12) (C 10 N 40/04 C 10 N 40:08)
Y	WO-A-8 604 601 (LUBRIZOL) * Claim 1; columns 7,8; table 1 *	3,4,6 -14	
X	US-A-3 879 306 (M.S. KABLAQUI) * Claim 1; columns 7,8; table 1 *	1,2,5,8 -14	
X	US-A-3 901 932 (F. TADA) * Claim 1; column 9, lines 55-60; column 12, line 34 - column 15, line 4; column 16, lines 11-19 *	1,2,5,8 -14	
X	GB-A-1 506 917 (SHELL) * Claim 1; page 1, lines 11-30; page 3, lines 16-23; page 4, line 11 *	1,2,5,8 -14	
Y	WO-A-8 707 637 (LUBRIZOL) * Claims 1-12; pages 82-83, 93-97; claims 1-17; page 4, paragraph 3 - page 4, paragraph 1; page 57, column 2; page 60, paragraph 3 - page 61, paragraph 2 *	3,4,6 -14	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int. Cl.5) C 10 M
Place of search THE HAGUE		Date of completion of the search 02-04-1990	Examiner RO TSAERT L.D.C.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 01.82 (P0601)